
GreenVoltage

RAPID CHARGE CYCLE
SILENT OPERATION
COMPLETELY EMISSION FREE
RELIABLE PERFORMANCE
COMPACT, PORTABLE DESIGN

EGEN30K® 60/90/100/120kWh
230V

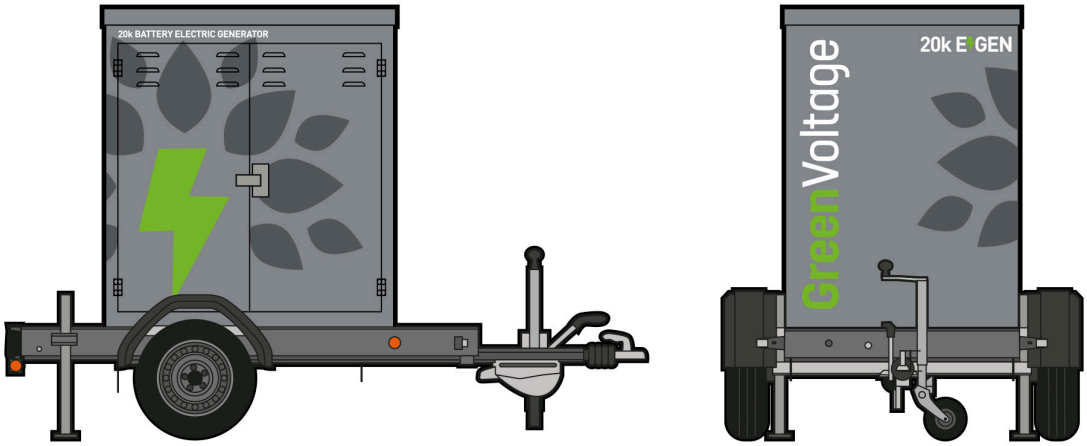

RATED OUTPUT
24kW Pure Sine Wave Inverter, Clean Power

AC OUTPUT - Single phase or Three phase
Three Phase: 63a 3phs/ 32a 3phs
Single Phase: 125a 1phs/ 63a 1phs/32a 1phs/16a 1phs
24kW maximum (3 phase available upon request 8kw per phase)

CHARGING
63a 1phs/125a 1phs (63a three Phase or 32a three phase on request)
Charging times:
32a1phs (8 hours from 0)
63a1phs (4.5hours from 0)
125a1phs (2.5hours from 0)
3 phase charging available upon request

STORAGE
60kWh / 80kWh / 100kWh / 150kwh available
Battery Type: Lithium-Ion Phosphate Additional storage optional

OPERATING CONDITIONS
Operating temperature -20 up to 40

MEASUREMENTS
Measurements on request

WEIGHTS
1200kg/1500kg/1800kg /2100kg

SAFETY
Non-Combustible Aluminium Enclosure
Recommended storage temperature: 10°C - 30°C
Brake assisted trailer

HYBRID AUTO START MODE
Switching off the generator, during low load periods, can help maximise operational efficiency, offering a potential saving of 215kg carbon a day, 1.5ton per week

CARBON OFFSET EQUIVALENT
Offsets 160kg of CO_2e for 8 hours operation

Follow us and find out more:

@greenvoltageuk
@greenvoltageuk

Green Voltage Limited
0800 292 2251
info@greenvoltage.co.uk
greenvoltage.co.uk
getgreenvoltage.com

DATA SHEET EGEN20K